

(19) World Intellectual Property
Organization
International Bureau



Rec'd PCT/PTO 06 JAN 2005



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/007117 A1

(51) International Patent Classification⁷: B22D 11/124,
11/06, 11/22

[IT/IT]; Via G. Paolini, 29, I-34070 Fogliano Redipuglia
(IT).

(21) International Application Number:
PCT/EP2003/007490

(74) Agent: GERVASI, Gemma; Notarbartolo & Gervasi
S.p.A., Corso di Porta Vittoria, 9, I-20122 Milan (IT).

(22) International Filing Date: 10 July 2003 (10.07.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
MI2002A001506 10 July 2002 (10.07.2002) IT

(71) Applicant (*for all designated States except US*): DANIELI
& C. OFFICINE MECCANICHE S.P.A. [IT/IT]; Via
Nazionale, 41, I-33042 Buttrio (IT).

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): KAPAJ, Nuredin
[AL/IT]; Via Caprera, 7, I-33100 Udine (IT). BAS-
SARUTTI, Alfredo [IT/IT]; Via G. Galilei, 5, I-33050
Cargnacco (IT). ZAMO', Giampietro [IT/IT]; Via
Bariglaria, 382, I-33100 Udine (IT). POLONI, Alfredo

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: STRIP TEMPERATURE REGULATING DEVICE IN A CONTINUOUS METAL STRIP CASTING PLANT

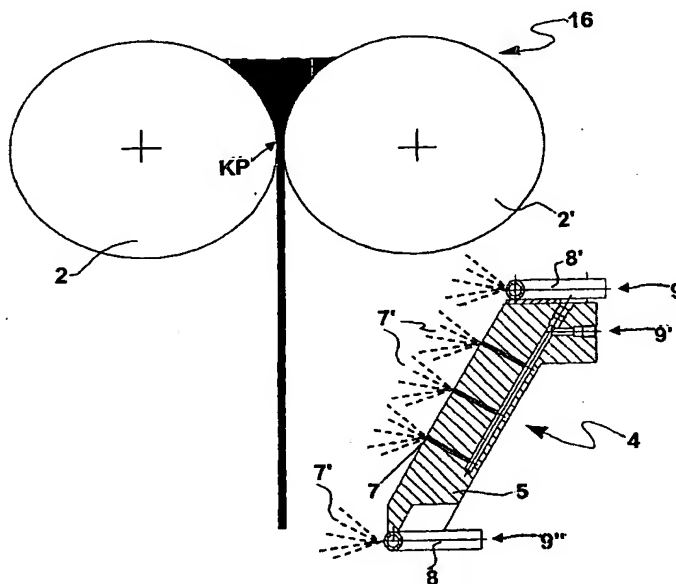

(57) **Abstract:** A temperature regulation device for the strip (3) produced in a continuous casting plant with ingot mould (16) comprising a pair of cooled, parallel, counter-rotating rolls (2, 2'), closed by two plates at the axial ends of the rolls, includes a pair of substantially rectangular panels (5) placed symmetrically under the plane of the rolls axis, with its longest dimension substantially parallel to the axis of the rolls. Ducts (6, 8, 8') are provided which feed a series of jets (7) to spray cooling gas onto the strip surface (3).

WO 2004/007117 A1